

High Discharge Rate AGM Battery

CH12-900W

CH (CSPower High Rate) series Valve Regulated Lead Acid (VRLA) battery is designed for heavy load discharge applications with 12years design life in float service. By using strong grids, thick plate and specially designed active material. It is with lower I.R, lower self discharge rate, high power, and longer service life. The CH series battery offers 30% more power output than the standard series. It is suitable for high power standby used, such as datacenter, UPS, EPS etc.


12V
900W

AGM
Technology

High Rate
Discharge



Dimensions & Weight

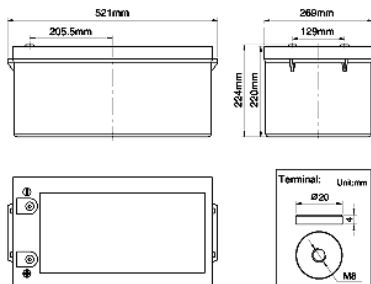

General Features

- Thicker plate with high Tin low Calcium alloy
- High Reliability and Good Quality
- Deep Discharge Recovery
- High Power Density
- Longer Service Life, in both Float or Cyclic

Technical Specifications

COMPLIED STANDARDS



Battery Dimensions	Length	520mm
	Width	268mm
	Height	220mm
	Total Height	226mm
Box Dimensions	Length	537mm
	Width	284mm
	Height	299mm
Quantity Per Box	1 PC per box	
Net weight Per Cell	79 kg±3%	
Net weight Per Box	79kg	
Gross Weight	79.8kg	

Nominal Voltage		12V
Watts/cell@15min		900W
Capacity 25°C(77°F)	10 hour rate (25.5A)	255Ah
	5 hour rate (44A)	220Ah
	1 hour rate (160A)	160Ah
Internal Resistance	Full Charged Battery 25°C	≤3.0mΩ
Capacity affected by Temperature (10 hour)	40°C (104°F)	102%
	25°C (77°F)	100%
	0°C (32°F)	85%
	-15°C (5°F)	65%
Self-Discharge 25°C(77°F) Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25°C (77°F)	Float	Initial Charging Current Less than51.0A Voltage 13.6-13.8V
	Cycle	Initial Charging Current Less than51.0A Voltage 14.4-14.9V

Battery Discharge Table

Discharge Constant Power per Cell (Watts at 77° F25° C)

F.V/Time	10min	15min	20min	25min	30min	45min	60min	90min	2h	3h	10h
1.60V	1140.3	920.7	740.7	627.9	549.4	460.1	319.2	266.9	202.1	146.2	52.3
1.67V	1119.6	900.0	731.5	616.1	539.1	451.8	313.3	262.2	198.6	143.9	51.1
1.70V	1098.9	887.5	718.0	604.9	529.3	443.5	307.3	256.7	194.4	140.9	50.5
1.75V	1078.2	870.7	695.3	593.7	519.5	435.2	302.0	252.0	190.8	138.5	49.3
1.80V	1036.8	837.0	665.8	570.7	499.4	418.5	290.1	242.5	183.7	133.2	47.6







Discharge Constant Current per Cell (Amperes at 77° F 25° C)

F.V/Time	10min	15min	20min	25min	30min	45min	60min	90min	2h	3h	10h
1.60V	611.4	493.6	397.2	336.7	294.6	246.7	171.2	143.1	108.4	78.4	28.1
1.67V	600.3	484.6	392.2	330.3	289.0	242.3	168.0	140.6	106.5	77.1	27.4
1.70V	589.2	475.9	385.0	324.3	283.8	237.8	164.8	137.6	104.2	75.5	27.1
1.75V	578.1	466.9	372.8	318.3	278.5	233.3	161.9	135.1	102.3	74.3	26.5
1.80V	555.9	448.8	357.0	306.0	267.8	224.4	155.6	130.1	98.5	71.4	25.5

Note: The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **CSPower** for the latest information.

High Discharge Rate AGM Battery CH12-900W

Performance Characteristics

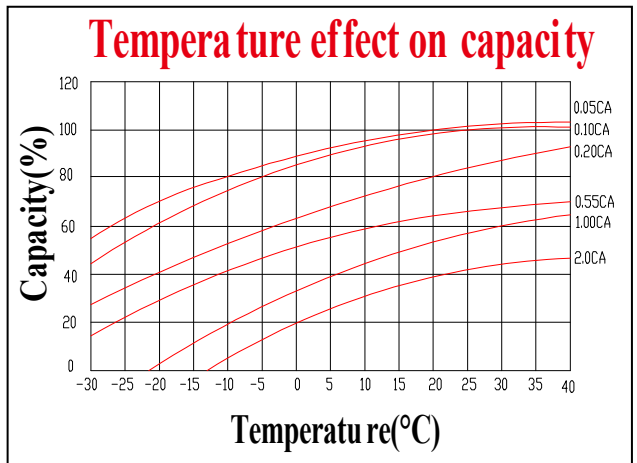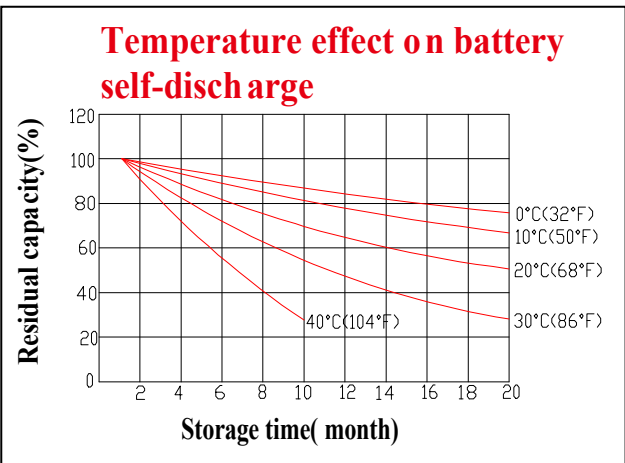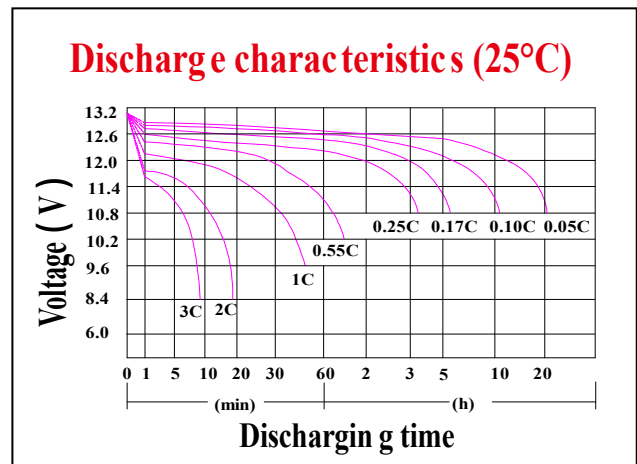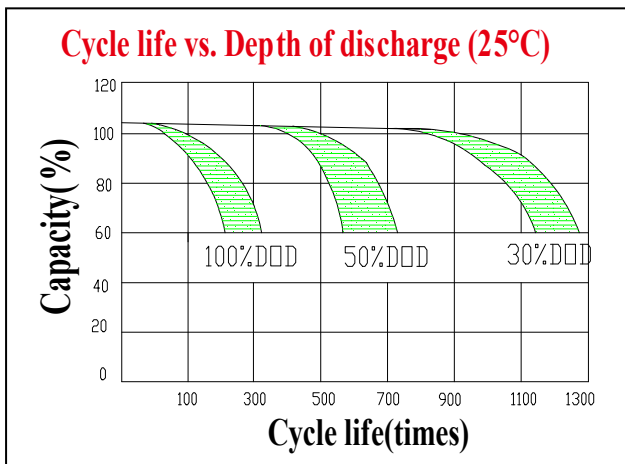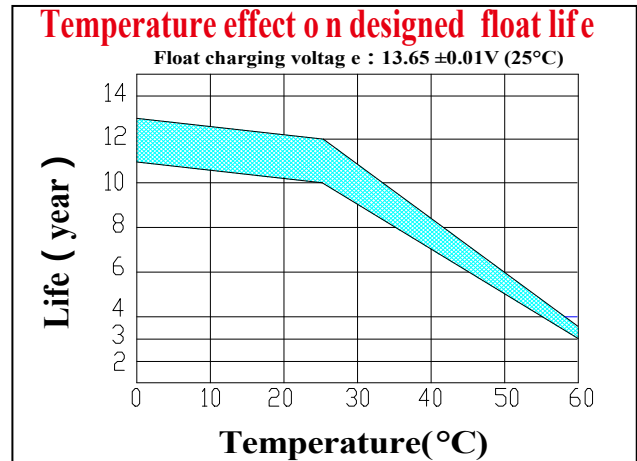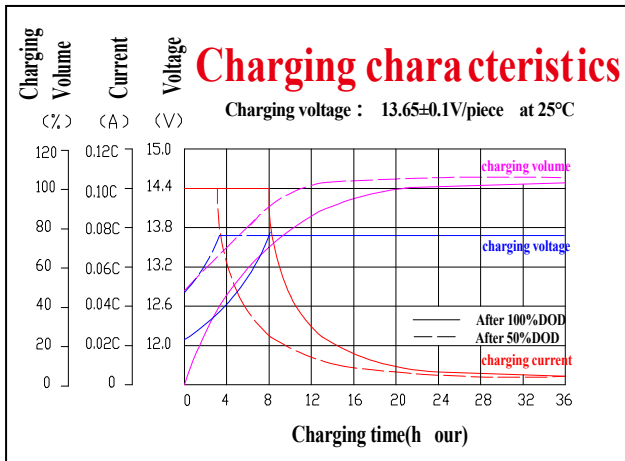

Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Si-Rubber	Copper	Fiberglass	Sulfuric acid