

GENERAL FEATURES

- Thick plate with high Tin low Calcium alloy
- High Reliability and Good Quality
- High gas recombination efficiency
- High Power Density
- Long Service Life, in Float or Cyclic


APPLICATIONS

- Solar Systems
- Power station
- Telecom systems
- Cable TV Systems
- UPS & EPS
- Renewable energy system



DIMENSIONS & WEIGHT

Length(mm)	171±1
Width(mm)	72±1
Height(mm)	205±1
Total Height(mm)	222±1
Weight(kg)	5.8±3%

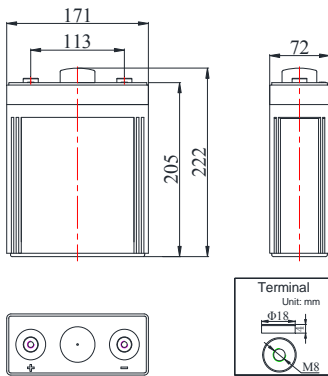

COMPLIED STANDARDS

IEC 60896-21/22	JIS C8704
YD/T799	BS6290 part4
GB/T 19638	UL 1989

TECHNICAL SPECIFICATIONS



Nominal Voltage		2V(1 cells per unit)
Design Floating Life @25°C		12 Years
Nominal Capacity @25°C (10 hour rate@10.0A,1.8V)		100Ah
Capacity @25°C	20 hour rate (5.30A,1.80V)	106.0Ah
	5 hour rate (17.6A,1.75V)	88.0Ah
	1 hour rate (64.1A,1.60V)	64.1Ah
Internal Resistance	Full Charged Battery@25°C	≤1.6mΩ
Ambient Temperature	Discharge	-20°C~50°C
	Charge	-20°C~50°C
	Storage	-20°C~50°C
Max.Discharge Current@25°C		500A(5s)
Capacity affected by Temperature (10 hr Capacity)	40°C	105%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-Discharge@25°C per Month		3%
Charge (Constant Voltage) @25°C	Standby Use	Initial Charging Current Less than 15A Voltage 2.23-2.27V
	Cycle Use	Initial Charging Current Less than 15A Voltage 2.33-2.37V

BATTERY DISCHARGE TABEL

Discharge Constant Current per Cell (Amperes at 25°C)

F.V/Time	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	106.3	80.5	64.1	37.5	28.6	22.2	18.6	16.2	13.0	10.5	5.55
1.65V	100.7	77.4	62.0	36.3	27.7	21.7	18.3	15.9	12.9	10.3	5.50
1.70V	97.8	74.6	60.3	35.3	27.0	21.2	17.9	15.6	12.7	10.2	5.44
1.75V	93.5	71.3	58.1	34.4	26.4	20.7	17.6	15.3	12.6	10.1	5.39
1.80V	90.1	68.7	56.1	33.1	25.6	20.2	17.2	15.0	12.2	10.0	5.30







Discharge Constant Power per Cell (Watts at 25°C)

F.V/Time	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	205.1	152.9	123.4	71.1	54.7	42.6	35.9	31.3	25.6	20.5	10.9
1.65V	195.9	147.7	120.1	69.2	53.3	41.8	35.3	30.8	25.4	20.3	10.7
1.70V	187.6	143.0	116.0	67.6	52.1	41.0	34.8	30.4	25.0	20.1	10.6
1.75V	178.3	137.3	111.8	66.0	51.1	40.1	34.3	29.9	24.4	19.9	10.5
1.80V	170.8	132.7	108.2	63.8	49.7	39.2	33.6	29.4	23.9	19.8	10.4

Note: The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice.

CSPower CL Series Deep Cycle AGM Battery CL2-100

PERFORMANCE CHARACTERISTICS

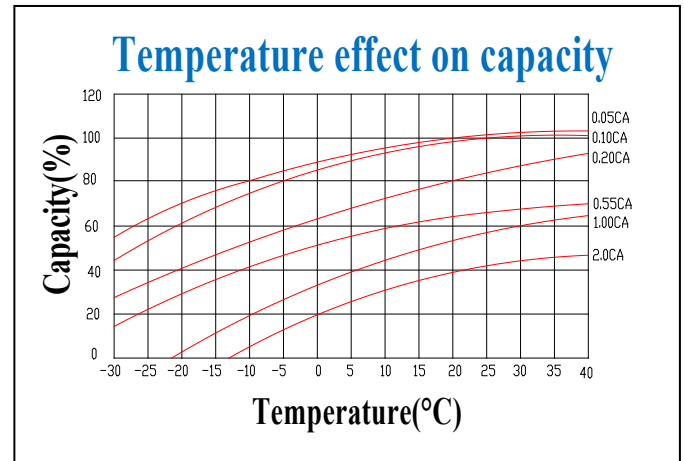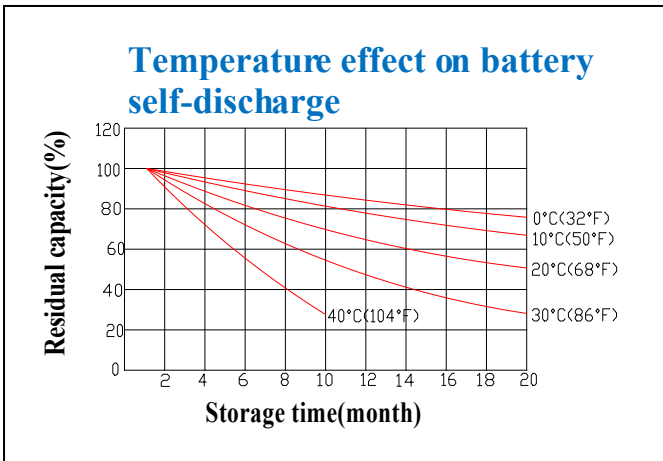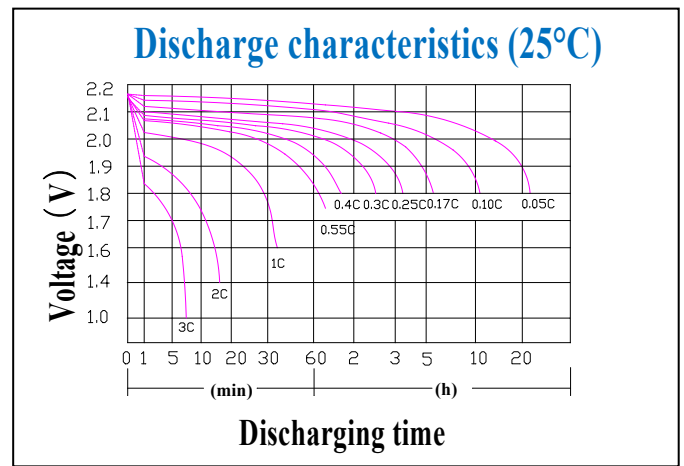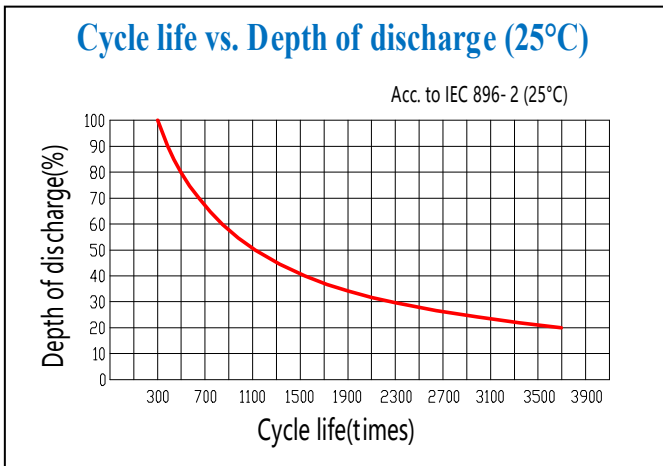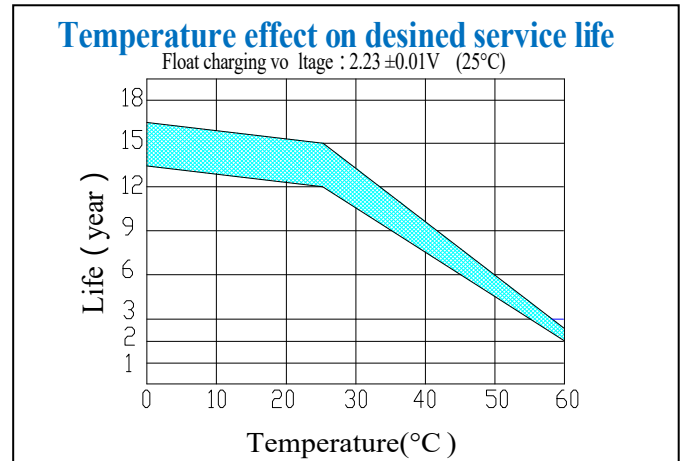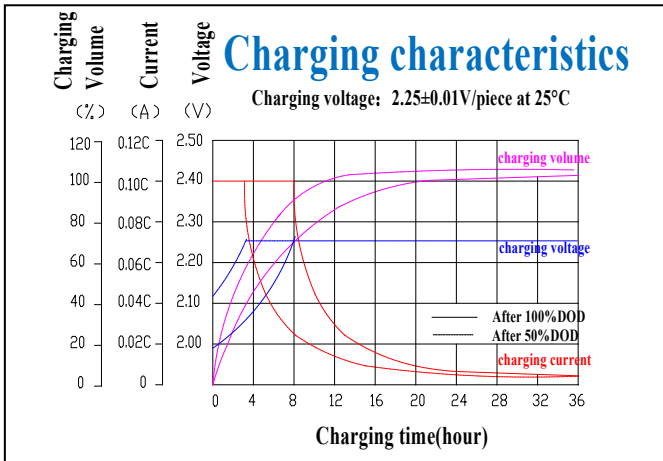

BATTERY CONSTRUCTION

Component	Positive plate	Negative plate	Container & Cover	Safety valve	Terminal	Separator	Electrolyte	Pillar seal
Features	Thick high Sn low Ca grid with special paste	Balanced Pb-Ca grid for improved recombination efficiency	ABS (UL94-V0 optional)	Flame Si-Rubbeand aging resistancer	Female Copper Insert M8(torque:7~9N.m	Advanced AGM separator for high pressure cell design	Dilute high purity sulphuric acid	Two layers epoxy resin seal

CSPower Battery Tech Co., Ltd.

Add: Floor 3, Evolution Space, NO.61, Liuxian 2nd Road, Baoan, Shenzhen, China

Tel: +86-755-29123661 Email: sales@cspbattery.com

CSPower
WWW.CSPBATTERY.COM