

HTL Pro High Temperature Deep Cycle GEL Battery

HTL12-14

The HTL Pro solid state deep cycle gel battery updated from HTL series and adopts the advanced developed nano gel electrolyte with **more** super-C additive plus **+2% thicker heavy duty plates** design inside. It has a **longer service life** even deep cycle discharge use and provide optimum and reliable service under extreme condition such as high temperature and frequent power failure, thus it is highly suited for tropical area in outdoor applications such as Telecom BTS stations and Off-grid PV system.

12V Voltage	14Ah Capacity	Gel Technology	Deep Cycle
-----------------------	-------------------------	--------------------------	----------------------



GENERAL FEATURES


- Able to operate at -40 ~ 60°C
- Integrated design to ensure the best uniformity and reliability
- Longer life and higher stability
1750 cycles @ 50% DOD
- **More** Super-C additives: Deep discharge recovery capability.

APPLICATIONS

- BTS Stations
- Solar & Wind energy system
- UPS system
- Telecom systems
- Wheel chair, Golf cart

DIMENSIONS & WEIGHT

Length (mm)	152±1
Width (mm)	99±1
Height (mm)	96±1
Total Height (mm)	102±1
Weight (kg)	3.8±3%

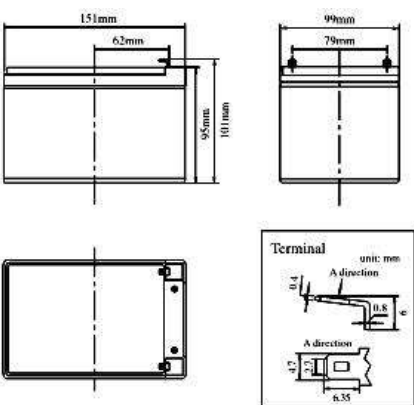

TECHNICAL SPECIFICATIONS

Nominal Voltage		12V (6 cells per unit)
Design Floating Life @25°C		10 Years
Nominal Capacity @25°C (20 hour rate@0.7A,10.8V)		14Ah
Capacity @25°C	10hour rate (1.26A,10.8V)	12.6Ah
	5 hour rate (2.3A,10.5V)	11.5Ah
	1 hour rate (8.5A,9.6V)	8.5Ah
Internal Resistance	Full Charged Battery@25°C	≤15.0mΩ
Ambient Temperature	Discharge	-25°C~60°C
	Charge	-25°C~60°C
	Storage	-25°C~60°C
Max.Discharge Current@25°C		84A(5s)
Capacity affected by Temperature (10 hour rate)	40°C	108%
	25°C	100%
	0°C	90%
	-15°C	70%
Self-Discharge@25°C per Month		3%
Charge (Constant Voltage) @25°C	Standby Use	Initial Charging Current Less than 3.6A Voltage 13.6-13.8V
	Cycle Use	Initial Charging Current Less than 3.6A Voltage 14.4-14.9V

BATTERY DISCHARGE TABEL

Discharge Constant Current per Cell (Amperes at 25°C)







F.V/Time	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h	100h
1.60V	23.2	15.4	10.8	8.5	5.2	4.0	2.5	1.8	1.39	0.77	23.2
1.65V	22.8	15.1	10.6	8.3	5.1	3.9	2.4	1.7	1.36	0.76	22.8
1.70V	22.3	14.8	10.4	8.2	5.0	3.8	2.4	1.7	1.34	0.74	22.3
1.75V	21.9	14.6	10.2	8.0	5.0	3.7	2.3	1.7	1.31	0.73	21.9
1.80V	21.1	14.0	9.8	7.7	4.8	3.6	2.2	1.6	1.26	0.70	21.1

Discharge Constant Power per Cell (Watts at 25°C)

F.V/Time	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h	100h
1.60V	44.6	29.6	20.8	16.3	10.1	7.6	4.8	3.4	2.7	1.5	44.6
1.65V	43.8	29.1	20.4	16.0	9.9	7.5	4.7	3.4	2.6	1.5	43.8
1.70V	43.0	28.6	20.0	15.7	9.7	7.3	4.6	3.3	2.6	1.4	43.0
1.75V	42.2	28.0	19.6	15.4	9.5	7.2	4.5	3.2	2.5	1.4	42.2
1.80V	40.6	27.0	18.9	14.8	9.2	6.9	4.4	3.1	2.4	1.3	40.6

Note: The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **CSPower** for the latest information.

PERFORMANCE CHARACTERISTICS

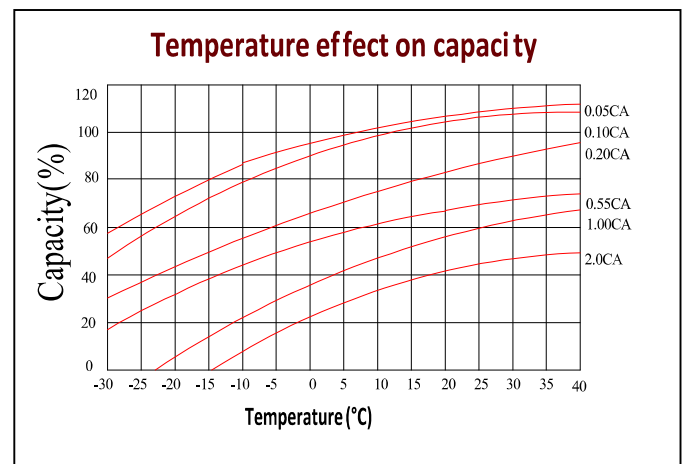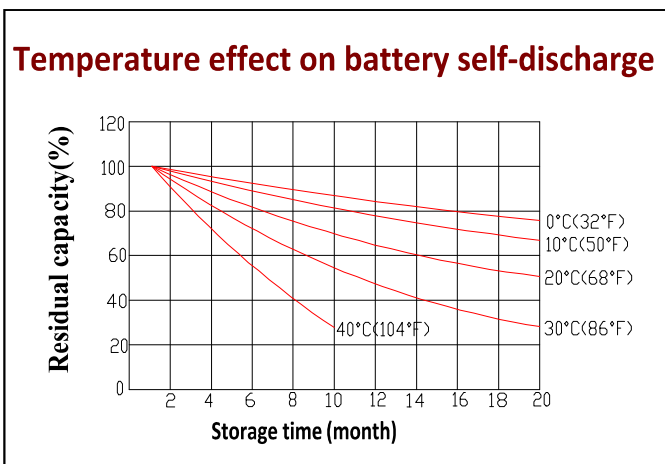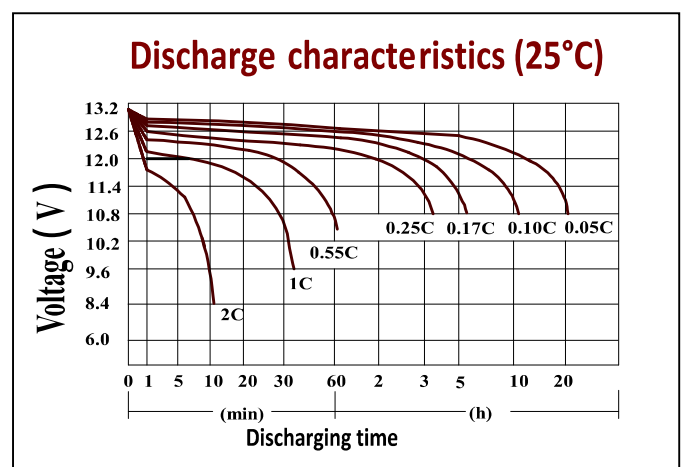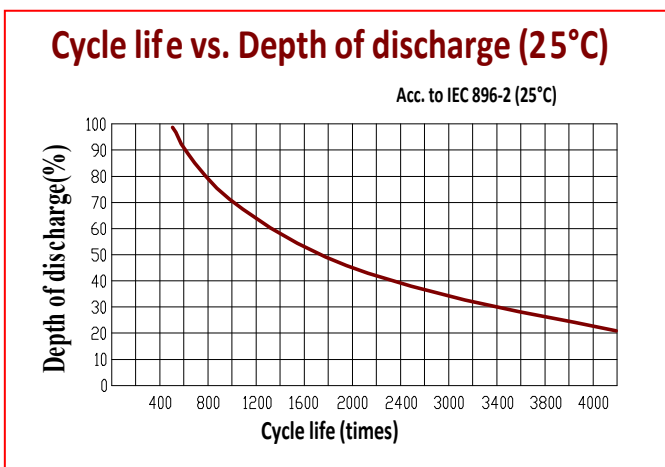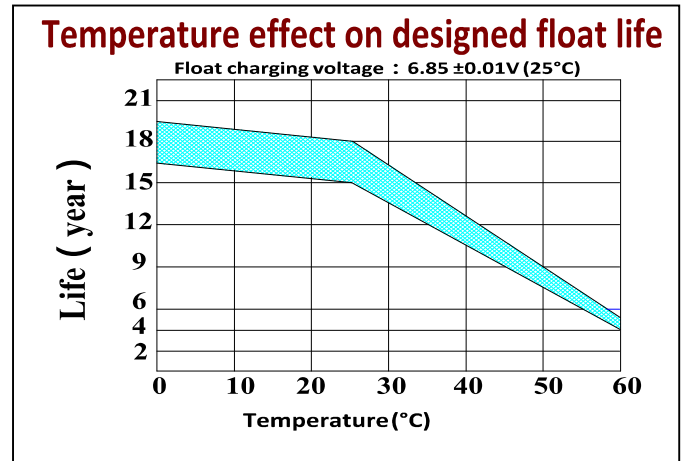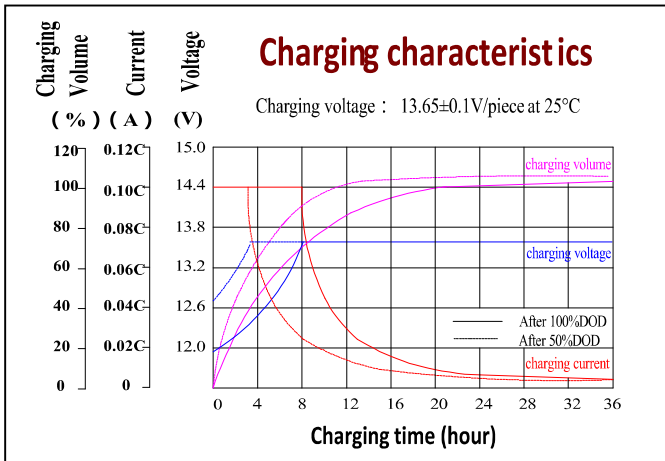

BATTERY CONSTRUCTION

Component	Positive plate	Negative plate	Container & Cover	Safety valve	Terminal	Separator	Electrolyte	Pillar seal
Features	Thick high Sn low Ca grid with special paste	Balanced Pb-Ca grid for improved recombination efficiency	Fire resistant ABS (UL94-V0 optional)	Flame Si-Rubber and aging resistance	F2/F1	Advanced PVC /AGM separator for high pressure cell design	Silicon Gel	Two layers epoxy resin seal

CSPower Battery Tech Co., Ltd.

Add: Evolution Space, NO.61, Liuxian 2nd Road, Baoan, Shenzhen, China
 Tel: +86-755-29123661 Email: sales@cspbattery.com