

High Discharge Rate AGM Battery

CH12-35W

CH (**CSPower High Rate**) series Valve Regulated Lead Acid (VRLA) battery is designed for heavy load discharge applications with 8 years design life in float service. By using strong grids, thick plate and specially designed active material. It is with lower I.R, lower self discharge rate, high power, and longer service life. The HR series battery offers 30% more power output than the standard series. It is suitable for high power standby used, such as datacenter, UPS, EPS etc.


12V
35W

AGM
Technology

High Rate
Discharge



Dimensions & Weight



General Features

- Thicker plate with high Tin low Calcium alloy
- High Reliability and Good Quality
- Deep Discharge Recovery
- High Power Density
- Longer Service Life, in both Float or Cyclic

Technical Specifications

COMPLIED STANDARDS



Battery Dimensions	Length	151mm
	Width	65mm
	Height	95mm
	Total Height	101mm
Box Dimensions	Length	364mm
	Width	165mm
	Height	141mm
Quantity Per Box		5 PC per box
Net weight Per Cell		2.55 kg±3%
Net weight Per Box		12.75kg
Gross Weight		13.2kg

Nominal Voltage		12V
Watts/cell@15min		35W
Capacity 25°C (77°F)	10 hour rate (0.8A)	8Ah
	5 hour rate (1.44A)	7.2Ah
	1 hour rate (5.4A)	6Ah
Internal Resistance	Full Charged Battery 25°C	≤20m Ω
Capacity affected by Temperature (10 hour)	40°C (104°F)	102%
	25°C (77°F)	100%
	0°C (32°F)	85%
	-15°C (5°F)	65%
Self-Discharge 25°C (77°F) Capacity	after 3 month storage	90%
	after 6 month storage	80%
	after 12 month storage	62%
Charge (Constant Voltage) 25°C (77°F)	Float	Initial Charging Current Less than 2.4A Voltage 13.6-13.8V
	Cycle	Initial Charging Current Less than 2.4A Voltage 14.4-14.9V

Battery Discharge Table

Discharge Constant Power per Cell (Watts at 77° F 25° C)







F.V/Time	5min	10min	15min	20min	25min	30min	45min	60min	90min	2h	3h	10h
1.60V	54.2	41.0	35.8	29.4	24.6	19.9	14.4	10.0	8.4	6.3	4.6	1.6
1.67V	53.2	40.3	35.0	29.0	24.2	19.5	14.2	9.8	8.2	6.2	4.5	1.6
1.70V	52.2	39.5	34.5	28.5	23.7	19.1	13.9	9.6	8.1	6.1	4.4	1.6
1.75V	51.2	38.8	33.8	27.6	23.3	18.8	13.7	9.5	7.9	6.0	4.3	1.5
1.80V	49.2	37.3	32.5	26.4	22.4	18.1	13.1	9.1	7.6	5.8	4.2	1.5

Discharge Constant Current per Cell (Amperes at 77° F 25° C)

F.V/Time	5min	10min	15min	20min	25min	30min	45min	60min	90min	2h	3h	10h
1.60V	29.0	22.0	19.2	15.8	13.2	10.7	7.7	5.4	4.5	3.4	2.5	0.88
1.67V	28.5	21.6	18.8	15.6	13.0	10.5	7.6	5.3	4.4	3.3	2.4	0.86
1.70V	28.0	21.2	18.5	15.3	12.7	10.3	7.5	5.2	4.3	3.3	2.4	0.85
1.75V	27.4	20.8	18.1	14.8	12.5	10.1	7.3	5.1	4.2	3.2	2.3	0.83
1.80V	26.4	20.0	17.4	14.2	12.0	9.7	7.0	4.9	4.1	3.1	2.2	0.80

Note: The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **CSPower** for the latest information.

Performance Characteristics

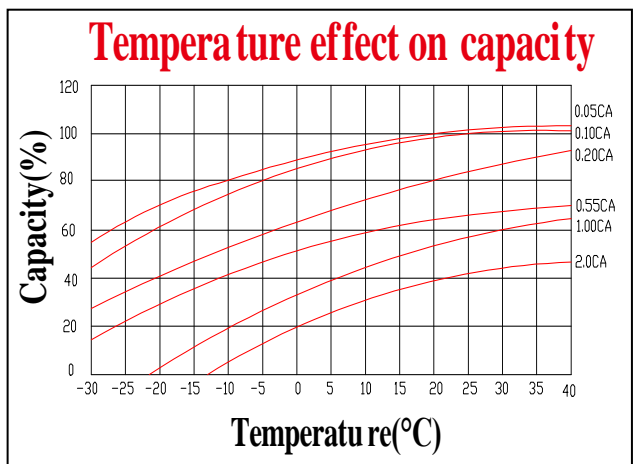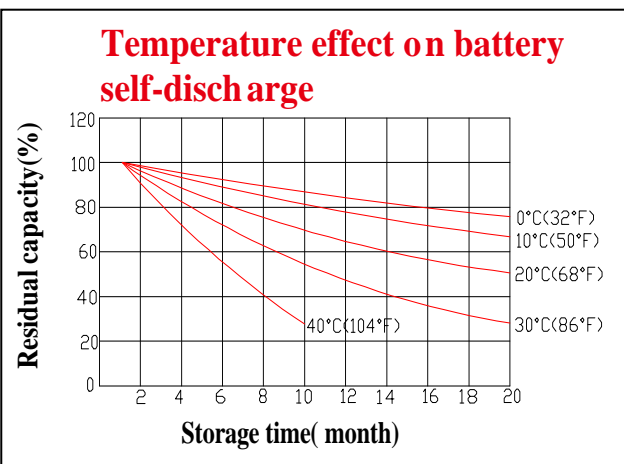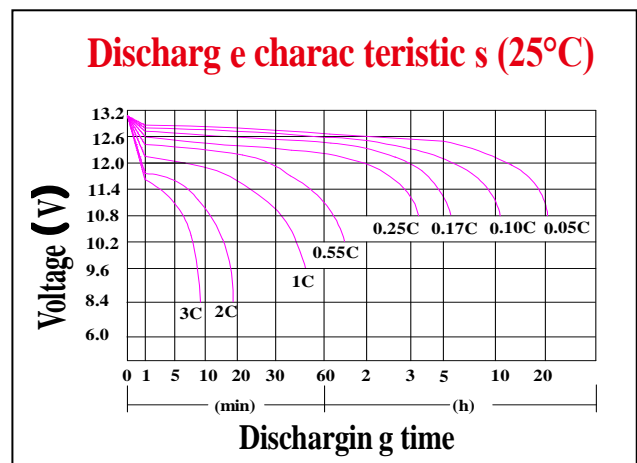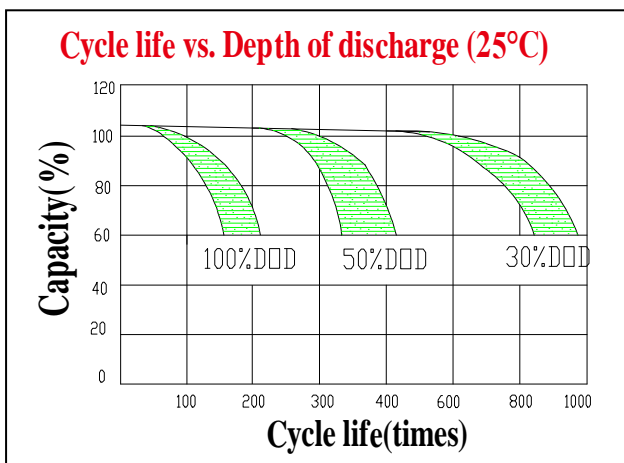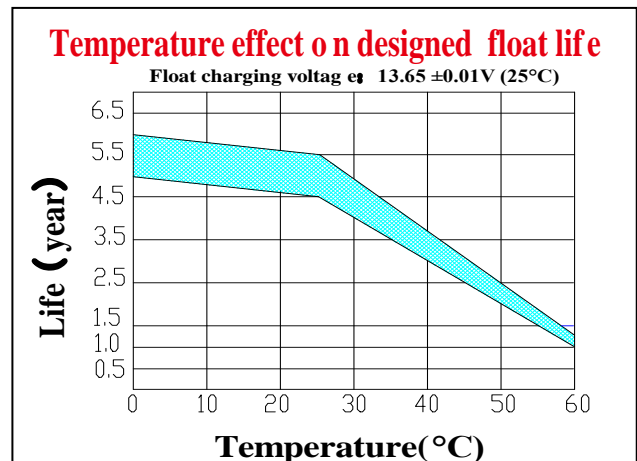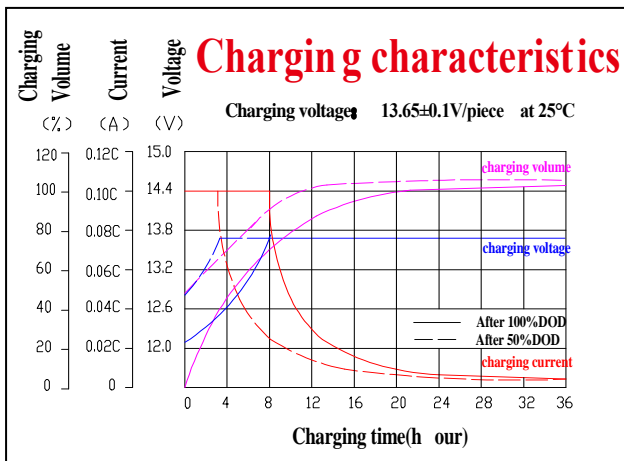

Battery Construction

Component	Positive plate	Negative plate	Container	Cover	Safety valve	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	ABS	ABS	Si-Rubber	Copper	Fiberglass	Sulfuric acid